

# HEX 12



## 6-Axis F/T Sensor Kit



**Resense**  
A Sense of Touch

**Resense 6-axis force torque sensors** measure forces and torques in the 3 spatial directions (6 degrees of freedom) using foil strain gauges. The main advantages are their **compact size** and the **hollow shaft option**, which are enabled by the sensor's multi-part deformation body.

The 6-axis F/T sensor kit includes the **F/T sensor**, the **electronics box** and an **application software** to visualize the measurement values.

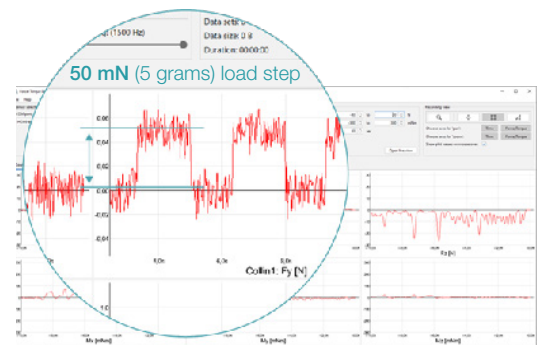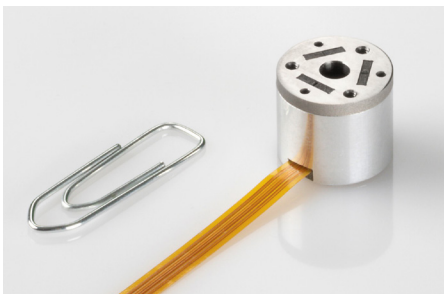

Sensor	
Ordering Code	HEX125S-020S-1R1-1
Dimensions	
Diameter <sup>a)</sup>	12.5 mm
Height	11.0 mm
Weight	3.3 g
Nominal measurement range	
$F_x, F_y, F_z$	$\pm 25$ N
$M_x, M_y, M_z$	$\pm 0.125$ Nm
Technical specifications	
Accuracy <sup>b)</sup>	1 %
Crosstalk	3 %
Overload capacity	300 %
Product features	
Material	Titanium grade 5
Protection class	IP20
Temperature range	0 - 50 °C
Technology	Foil strain gauges
Cable	Flex cable with axial/radial cable outlet and Sub-D-HD connector

a) The diameter excludes any connector or cable features.

b) The accuracy is the difference between the applied and the actually measured load. The maximum measurement accuracy in percent refers to the full scale value of the sensor.

c) The HEX 12 is the smallest, commercially available 6-axis force torque sensor according to our research.

### The smallest 6-axis F/T sensor in the world<sup>c)</sup>

The **HEX 12** is the smallest commercially available 6-axis force torque sensor in the world<sup>c)</sup>. It fits for applications where space is extremely limited.

Target applications mainly cover the following areas:

- Finger-force research
- Artificial hands
- Surgical robotics
- Dental research

The sensor kit not only includes our **sensor** but also the **electronics box** and an **application software**. The microcontroller digitizes the analog output signals of the sensor. A calibration matrix is used to calculate the forces and torques in all 6 dimensions, before the values are transmitted to the connected PC via UART or USB. The F/T Explorer application software offers features for real-time visualization and storage of the sensor readings.

Electronics board	
Ordering code	EVAL 100S-06-1
Product features	
Dimensions	54 x 25 x 12.6 mm
Supply voltage	5 V
Interface	USB, UART
Sample rate	100 Hz, 500 Hz, 1kHz
Resolution (ADC)	24 bit